


Three Phase Smart Meter with 6CT

DTSU666 with 6CT is especially designed for AC coupled senario to monitor power conditions and measure power generation and energy consumption, enabling you to keep track of the power status and regulate the power flow within the system at any time.

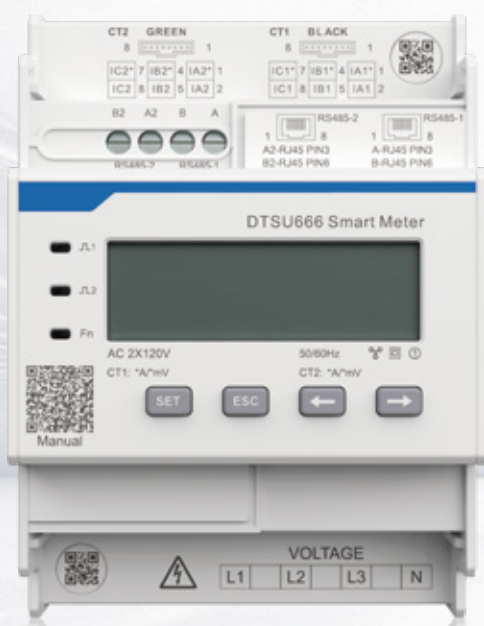

Model	DTSU666
Power Supply	
Grid type	hree phase
Rated voltage	AC 3×230/400V
Frequency	50Hz/60Hz
Measurement Range	
Line voltage	400Vac
Phase voltage	230Vac
Current	100A
Measurement Accuracy	
Active energy	Class B
Reactive energy	Class 2
Communication	
Interface	RS485
Communication protocol	Modbus RTU
Environmental Condition	
Operating temperature range	-25°C ~ +55°C
Storage temperature range	-40°C ~ +70°C
Operating humidity	≤75% (Non-condensing)
General Data	
Dimensions (H x W x D)	100×72×65 mm
Mounting type	DIN 35mm
Accessories	6 × CT 100A/40mA

DTSU666