


465W-485W

AExxxCMD-120BDS

22.51%
MAXIMUM EFFICIENCY

120
HALF CELLS

- ◆ N-type cell technology
- ◆ High efficiency and power output
- ◆ Cost-effective scalability and market dominance
- ◆ Low degradation and high durability

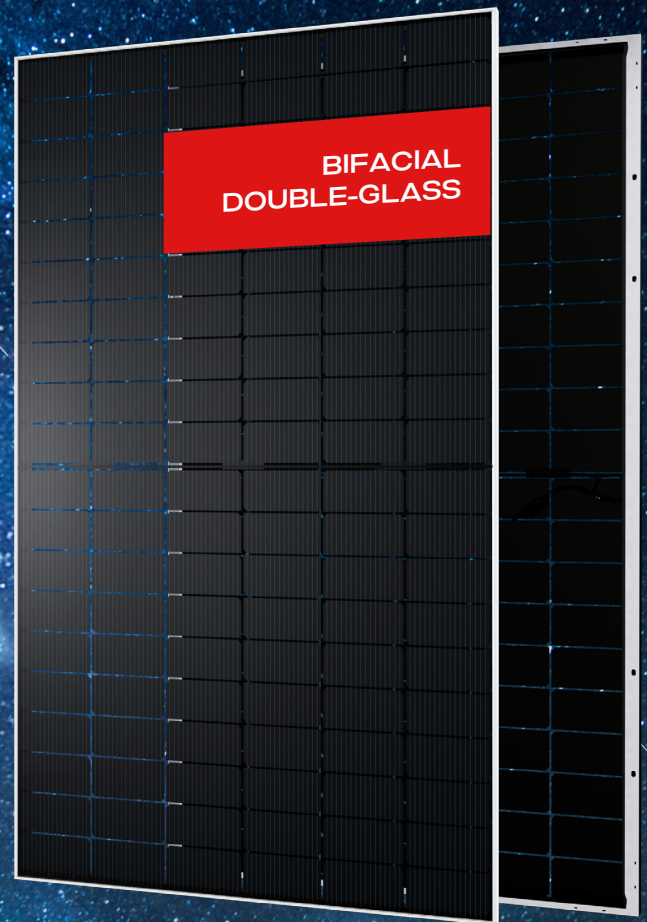





Ver. 25.8.2

30 YEARS
Performance Warranty

15 YEARS
Product Warranty

OUR PERFORMANCE WARRANTY

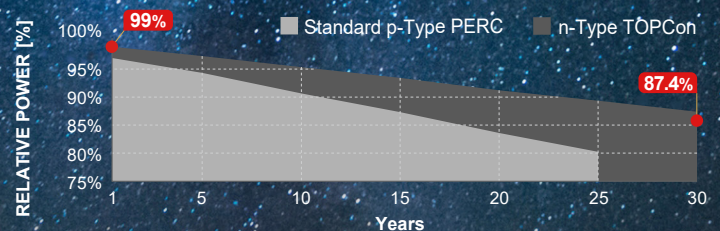

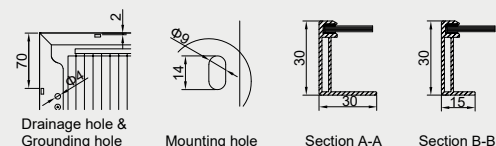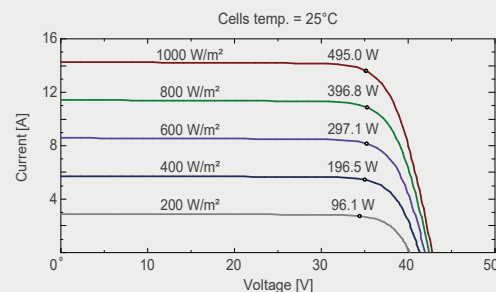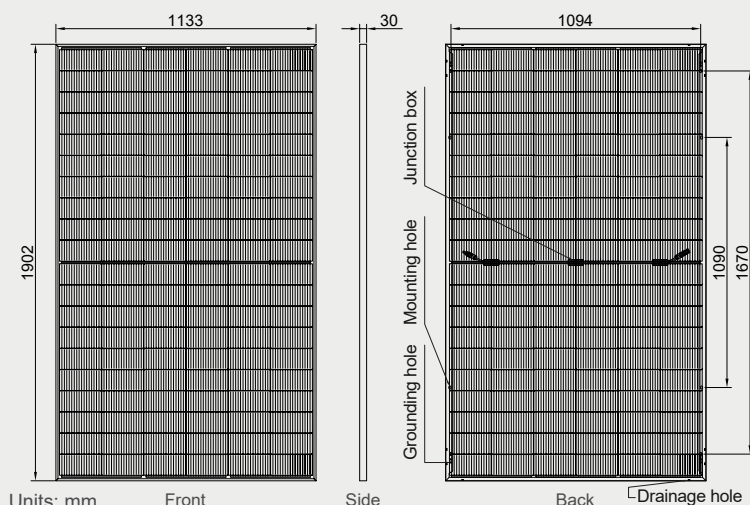

Electrical specifications (STC*):

Nominal max. power	P_{max} (Wp)	465	470	475	480	485
Maximum operating voltage	V_{MPP} (V)	34.89	35.05	35.22	35.38	35.55
Maximum operating current	I_{MPP} (A)	13.33	13.41	13.49	13.57	13.65
Open-circuit voltage	V_{oc} (V)	42.22	42.38	42.54	42.71	42.87
Short-circuit current	I_{sc} (A)	14.07	14.15	14.23	14.31	14.38
Module efficiency	η (%)	21.58	21.81	22.04	22.27	22.51
Maximum system voltage	(V)	1500				
Maximum series fuse rating	(A)	25				
Measurement Tolerance:		P_{max} : $\pm 3\%$		V_{oc} : $\pm 3\%$		I_{sc} : $\pm 3\%$
Bifaciality Coefficient (Φ):		ΦP_{max} : $80 \pm 5\%$		ΦV_{oc} : $99 \pm 1\%$		ΦI_{sc} : $80 \pm 5\%$

*STC: Standard Test Conditions (irradiance 1000 W/m², cell temperature 25°C and air mass of AM1.5), Power Binning: 0-3%

Electrical specifications (BSI*):

Short-circuit current	I_{sc} (A)	17.07	17.19	17.31	17.42	17.54
-----------------------	--------------	-------	-------	-------	-------	-------

*BSI: BSI Test Conditions ($G=1000$ W/m² + p^*300 W/m², cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):

Nominal max. power	P_{max} (Wp)	355	360	365	370	375
Maximum operating voltage	V_{MPP} (V)	32.88	33.14	33.40	33.66	33.92
Maximum operating current	I_{MPP} (A)	10.80	10.86	10.93	10.99	11.06
Open-circuit voltage	V_{oc} (V)	38.94	39.26	39.58	39.90	40.24
Short-circuit current	I_{sc} (A)	11.40	11.46	11.53	11.59	11.65

*NMOT: Normal Module Operating Temperature (irradiance 800 W/m², ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

Electrical specifications (BNPI*):


Nominal max. power	P_{max} (Wp)	515	520	525	530	535
Open-circuit voltage	V_{oc} (V)	42.22	42.38	42.54	42.71	42.87
Short-circuit current	I_{sc} (A)	15.25	15.34	15.43	15.51	15.60
Measurement Tolerance:		P_{max} : $\pm 3\%$		V_{oc} : $\pm 3\%$		I_{sc} : $\pm 3\%$

*BNPI: Bifacial Nameplate Irradiance($G=1000$ W/m² + p^*135 W/m², cell temperature 25°C and air mass of AM1.5)

Mechanical and design specification

Cell type	n-Type TOPCon technology, half-cut cells
No. of cells	120
Front cover	2.0 mm glass, high transmission, AR coated, tempered
Encapsulation	POE
Back cover	2.0 mm, high transmission solar glass, tempered
Junction box	IP68 rated, 3 bypass diodes
Frame	30 mm anodized aluminium alloy
Cable (Including Connector)	1 x 4 mm ² , 350 mm length or customized
Connectors	PV-XT101.2 (from XTONG Photovoltaic Technologies Co., Ltd.)
Dimension	1902 mm x 1133 mm x 30 mm
Weight	25.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Rear test load	2400 Pa or 244 kg/m ²
Front test load	5400 Pa or 550 kg/m ²
Fire rating	Class A (according to UL 790)

Packaging information

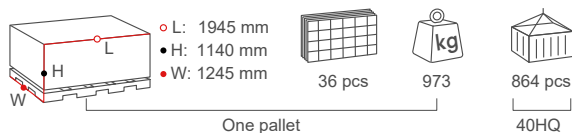

Temperature ratings

Operating temperature	-40 to +70°C
Temp. coefficient of P_{max}	-0.29 %/°C
Temp. coefficient of V_{oc}	-0.25 %/°C
Temp. coefficient of I_{sc}	0.046 %/°C
Nom. operating cell temp. NOCT	42 $\pm$ 2°C

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.



AESOLAR

Since 2003

+49 8231 978268 0
sales@ae-solar.com
www.ae-solar.com

AESOLAR
Senefelderstraße 23
86368 Gersthofen, Germany
Country of Origin: China